SPEC SHEET



















Contact PT Hydraulics Head Office or vour Regional Sales Manager

TWP & RWP Hydraulic Pumps

sshhh... listen close... these pumps are quiet...

Power Team Pumps have been continually up-graded for over 40 years; some of the originals are still in service! To meet market needs, PT Hydraulics and Power Team have modified the standard Torque Wrench Pumps, both Air and Electric powered. These new pumps still retain the famous 55 Series Pump but have a new valve to compliment the everlasting pump. The new valve is a single solenoid cartridge style 4 Position, 2 Way valve with an adjustable "B" port relief valve. The new pumps are set for single tool operation as standard however can be fitted with a manifold for 4-Tool operation.

TWP55-50-220-01


POWER TEAM

		Oil	Jan.	Overall	Overall	Overall	Pump
/4	Oil Delivery per	Reservoir Usable		Width	Length	Height	Weight
Pump Model	min.	ltr.	Oil Itr.	mm.	mm.	mm.	w/oil kg.
TWP55-50-220-01	11.5 ltr @ 7 bar	9.5	8.4	435	241	460	34
	0.9 ltr @ 700 bar		10				A STATE

- Two Speed High Performance Pump
- External adjustable pressure regulator
- Retract side internal relief valve protects tool
- **Hand remote**
- Remote control with 30 Foot cord

dBA Reading • At Idle - 79 - 80 dBA • At 10,000 psi - 82 - 83 dBA

RWP55

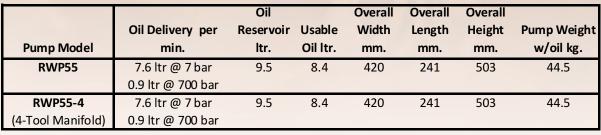



- Use where air is the preferred source of power
- Powerful 3hp motor starts under load
- External adjustable pressure regulator
- Retract side internal relief valve protects tool
- Use for double or single acting tools
- Pneumatic remote control with 25 Foot Cord

Air Motor Air Control – 3hp, 50cfm @ 5.5 bar